

Refresh Eco

Ready-to-use spray for refreshing furniture that looks dry and worn out

Refresh Eco is a ready-to-use sprayable product that refreshes and restores all wooden tables, worktops and furniture that have been treated with oil. Depending on wear and tear, Refresh Eco can be applied several times a year at certain areas. This may be necessary if the surface feels dry.

Refresh Eco is not pigmented. To restore the colour, use Oil Plus 2C in the colour with which the surface area was treated.




PRODUCT INFORMATION

› Technical characteristics

- Physical state at 20°C: liquid
- Odour: characteristic
- Colour: white
- Density: 1.00 kg/L
- VOC content: 0 g/L
- Solubility: completely soluble

› Packaging

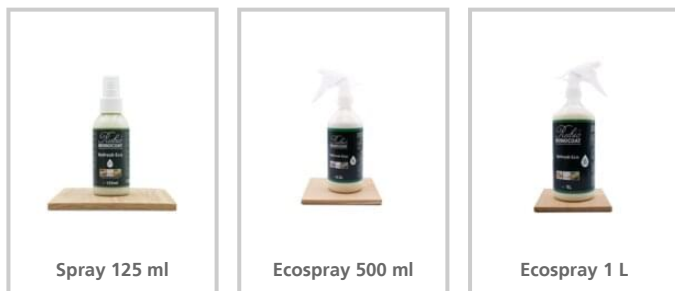

› Storage

The product can be stored up to 36 months in dry conditions and in its original packaging. Keep away from frost.

APPLICATION INFORMATION

› Instructions

STEP 1. Vacuum the surface. Remove dust, sand, stones, ...

STEP 2. Clean the surface to be treated with Universal Soap, Surface Care or All Natural Wood Cleaner (Spray) (consult the TDS before use). Let dry.

STEP 3. Spray a small amount of Refresh Eco on the surface to be treated.

STEP 4. Spread out the product in the direction of the wood fibres with the Microfiber Pad or a microfibre cloth.

STEP 5. Let the surface dry for at least 1 hour before using the surface again.

› Tips & Tricks


- Please note: this product is not suitable for floors or stairs. This product makes such surfaces too slippery.

› Consumption

± 100 m²/L

** These usages are merely indicative. Results depend on wood type and method of preparation. It is always recommended to make a sample in order to calculate the exact usage.*

› Tools

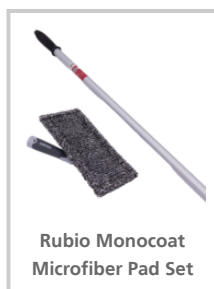

Check the packaging and the safety data sheet for more details.

For our complete assortment of products for the protection and colouring of interior and exterior wood, please visit
www.rubimonocoat.com

LIABILITY: It is the user's responsibility to establish, through his own tests, whether the product is suitable for the chosen application. In no case can Muylle Facon NV be held liable for any consequential damage. The information above may be subject to changes, which will be published in the updated versions of the technical data sheet. We cannot be held liable for poor results due to causes that are not related to the quality of the product. This technical information has been drawn up based on the currently available information and knowledge. The most recent technical data sheets can be requested or are available on the website.

Date of TDS: 25/11/2025. Check the safety information before using the product.



Rubio[®]
MONOCOAT
MUYLLE  FACON

Muylle Facon NV

Ambachtenstraat 58

8870 Izegem (BELGIUM)

Phone +32 (0) 51 30 80 54

Fax +32 (0) 51 30 99 78

info@muyllefacon.be

www.rubimonocoat.com